


● Performance curve


ISO9906 Annex A 2900rpm

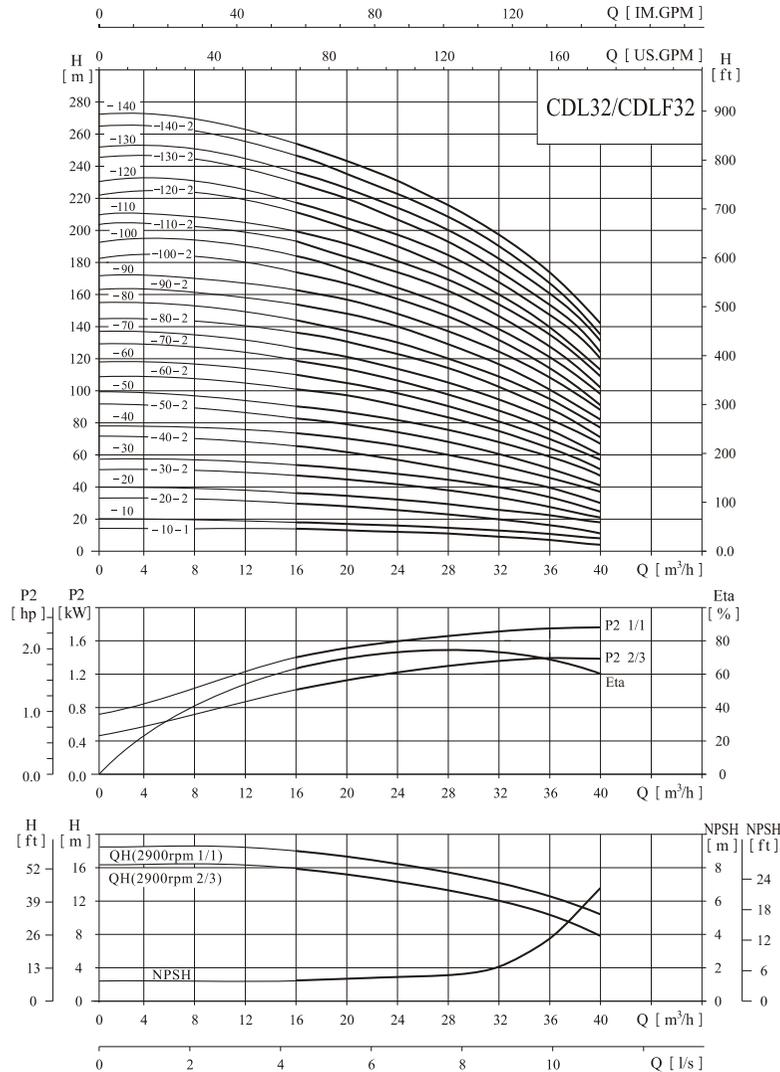

● Performance table

Model	Driving motor		Q (m³/h)	H (m)							Model	Driving motor		Q (m³/h)	H (m)						
	(kW)	(hp)		16	20	24	28	32	36	40		(kW)	(hp)		16	20	24	28	32	36	40
CDL32-10-1	1.5	2	16	14	13	12	11	9	7	4	CDL32-80-2	15	20	136	131	123	114	102	90	71	
CDL32-10	2.2	3	20	18	17	15	14	13	11	8	CDL32-80	15	20	144	138	130	120	109	97	77	
CDL32-20-2	3.0	4	24	29	28	26	23	20	16	11	CDL32-90-2	18.5	25	154	148	140	129	117	102	82	
CDL32-20	4.0	5.5	28	36	34	32	29	27	23	18	CDL32-90	18.5	25	162	156	147	136	124	109	88	
CDL32-30-2	5.5	7.5	32	47	44	41	38	33	28	21	CDL32-100-2	18.5	25	175	166	157	146	131	115	91	
CDL32-30	5.5	7.5	36	54	51	48	44	40	35	27	CDL32-100	18.5	25	182	173	164	152	138	122	98	
CDL32-40-2	7.5	10	40	65	62	58	53	46	40	30	CDL32-110-2	22	30	193	184	173	164	146	128	102	
CDL32-40	7.5	10	44	72	69	65	59	53	47	37	CDL32-110	22	30	200	191	180	168	153	135	109	
CDL32-50-2	11	15	48	83	79	74	68	60	52	41	CDL32-120-2	22	30	211	201	189	178	160	140	113	
CDL32-50	11	15	52	90	86	81	74	67	59	47	CDL32-120	22	30	218	208	196	184	167	147	120	
CDL32-60-2	11	15	56	101	97	90	83	74	65	51	CDL32-130-2	30	40	230	218	206	193	174	153	124	
CDL32-60	11	15	60	108	104	97	90	81	72	57	CDL32-130	30	40	237	225	213	200	181	160	131	
CDL32-70-2	15	20	64	119	114	107	98	88	78	60	CDL32-140-2	30	40	247	235	222	210	189	165	135	
CDL32-70	15	20	68	126	121	113	105	95	85	67	CDL32-140	30	40	255	242	229	216	196	172	142	

● Installation sketch

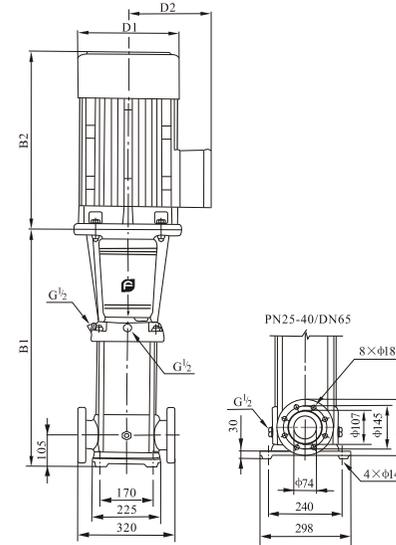

● Size and weight

Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
CDL32-10-1/CDL32-10	505	290	795	190	155	64/68
CDL32-20-2/CDL32-20	575	315/335	890/910	197/230	165/180	77/85
CDL32-30-2/CDL32-30	645	430	1075	260	208	100
CDL32-40-2/CDL32-40	715	430	1145	260	208	109
CDL32-50-2/CDL32-50	890	490	1380	330	255	181
CDL32-60-2/CDL32-60	960	490	1450	330	255	185
CDL32-70-2/CDL32-70	1030	490	1520	330	255	199
CDL32-80-2/CDL32-80	1100	490	1590	330	255	203
CDL32-90-2/CDL32-90	1170	550	1720	330	255	222
CDL32-100-2/CDL32-100	1240	550	1790	330	255	227
CDL32-110-2/CDL32-110	1310	590	1900	360	285	272
CDL32-120-2/CDL32-120	1380	590	1970	360	285	276
CDL32-130-2/CDL32-130	1450	660	2110	400	310	337
CDL32-140-2/CDL32-140	1520	660	2180	400	310	341

The overall dimensions of the single-phase motor and explosion-proof motor are a little different. Pls contact us for details.